


LIFTINGS

| | |
|---------------------|---|
| Country | TUNISIA |
| Terminal | La Skhirra terminal operated by TRAPSA |
| Location | Located on the east coast of Tunisia |
| Loading Restriction | Loading jetty accepts vessels up to 120k DWT and 147m to 300m LOA |
| Loading Rate | 1,700 metric tons/hour |
| Cargo Size | 100,000 bbl to 350,000 bbl subject to +/- 5% tolerance |
| Note | Draft is restricted to 14.5 m |



CRUDE OIL CHARACTERISTICS

| | |
|----------|---|
| General | Zarzaitine is a very light and low sulfur, paraffinic crude oil. |
| Naphtha | 22 LV% yield excellent for reforming feedstock with 56 LV% N+2A. |
| Kerosene | Good for Jet Fuel production in a hydrotreating unit; very low sulfur and smoke point in a wide range of boiling points. |
| Gas Oil | Suitable 19 LV% yield that has good cetane index. The S.R. Gas Oil with very low sulphur content makes an excellent option to produce Diesel. |
| VGO | Excellent thermal and catalytic feedstock to produce lubricants. |
| Residue | Good very low delayed coking unit feedstock. It is suitable for Anode Grade Pet Coke. |

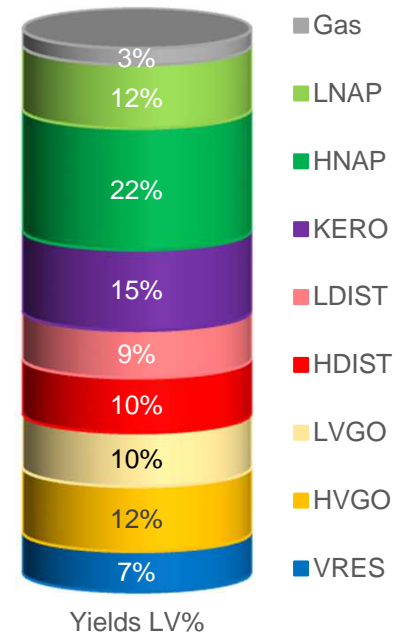

ZARZAITINE

| | |
|--------------------|--------|
| API Gravity | 43.47 |
| Density 15°C kg/l | 0.8083 |
| Sulfur WT% | 0.11 |
| Nitrogen ppm | 390 |
| RVP kPa | 34.38 |
| Pour Point °C | -36 |
| TAN mgKOH/g | 0.05 |
| Viscosity 40°C cSt | 2.9 |
| Viscosity 50°C cSt | 2.4 |
| Vanadium ppm | 1 |
| Nickel ppm | 1.6 |

Perenco makes no representations or warranties express or implied, regarding the accuracy, adequacy, reasonableness or completeness of the information, assumptions or analysis contained herein or in any supplemental materials, and Perenco accepts no liability in connection therewith. This information on the crude oil presented here was prepared by Perenco. It is for your private information and we are not soliciting or suggesting any action based upon it. The actual yields and qualities of production may vary and no representation or warranty, expressed or implied, is made as to the accuracy or completeness of the information in this brochure or any accompanying crude assay.