

## LIFTINGS


Country	CONGO
Terminal	FPSO Conkouati operated by Perenco Congo SA
Location	Offshore 23 miles north west of Pointe Noire
Loading Restriction	FPSO Conkouati accepts up to 155k DWT vessels
Loading Rate	22,000 bbl/hour – loading done in tandem (side by side)
Cargo Size	400,000 bbl to 600,000 bbl
Note	Draft is restricted to 15 m



## CRUDE OIL CHARACTERISTICS

General	Yombo is a low sulfur heavy grade sweet naphthenic Fuel Oil with low pour point that yields excellent Mid-distillates with remarkably good cold properties.
Naphtha	Good for reformer feedstock.
Kerosene	Excellent cold properties, and high aniline point makes it perfect as Jet Fuel feedstock.
Gas Oil	Excellent cold properties, good cetane index combined with low sulfur makes it perfect for Diesel production.
VGO	Remarkably good thermal fluid with high thermal stability.
Residue	Makes +40 LV% of excellent Asphalt with high ductility and a good range of viscosity grades.

\*Minimum Flash Point specification (ASTMD93): 150° Fahrenheit

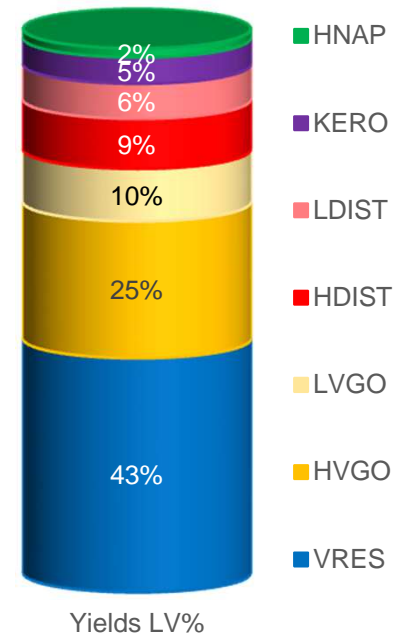

## YOMBO

API Gravity	16.67
Density 15°C kg/l	0.9544
Sulfur WT%	0.336
Nitrogen ppm	3500
RVP kPa	2.76
Pour Point °C	-12
TAN mgKOH/g	0.87
Viscosity 40°C cSt	599.6
Viscosity 50°C cSt	654.2
Vanadium ppm	3
Nickel ppm	32

Perenco makes no representations or warranties express or implied, regarding the accuracy, adequacy, reasonableness or completeness of the information, assumptions or analysis contained herein or in any supplemental materials, and Perenco accepts no liability in connection therewith. This information on the crude oil presented here was prepared by Perenco. It is for your private information and we are not soliciting or suggesting any action based upon it. The actual yields and qualities of production may vary and no representation or warranty, expressed or implied, is made as to the accuracy or completeness of the information in this brochure or any accompanying crude assay.

